



EncapSulite

www.encapsulite.com

Fixture Line

Shatterproof Line

WaterGuard

Wash-Down Rated for 1200 PSI

UL 1598 | UL-EPH

Available in LED, T5, T5HO & T8



WaterGuard LED HO 100 Series

Working Temp from -40°F - 100°F

Diameter: 4"

Lengths: 2ft,4ft & 8ft



WaterGuard LED 70 Series

Working Temp from -40°F - 110°F

Diameter: 2 3/4"

Lengths: 2ft,4ft & 8ft




WaterGuard Plus Series

Working Temp from -20°F - 150°F

Diameter: 2" & 2 3/4"

Lengths: 1FT-8FT

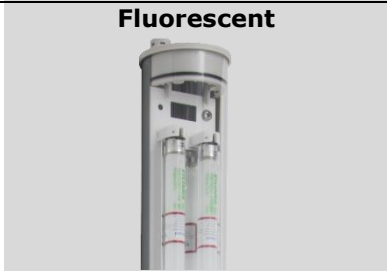

PoultryLite LED

Calming Effect in Poultry Kill Process Area

PoultryLite Blue
PoultryLite Red

Lengths: 2FT, 4FT, 8FT



UltraGuard

Shatterproof Teflon® protection will not crack or discolor

Temp rated 400°F

FDA,USDA and OSHA compliant



ProGuard

Shatterproof Lexan protection will not crack or discolor

Temp rated 135°F

FDA,USDA and OSHA compliant



LED T8

Shatterproof Teflon® protection will not crack or discolor

Direct Fit – Works with instant start ballast

FDA,USDA and OSHA compliant



ShardGuard

Shatterproof Teflon® protection will not crack or discolor

FDA,USDA and OSHA Compliant



Gold Semiconductor

Blocks emissions below 520 nanometers

Shatterproof Gold PET protection will not crack



CHAPMAN COMPANY

1338 Hundred Oaks Drive, Suite D
Charlotte, NC 28217

800.888.3702

www.rwchapman.com

